


**OBEX**

## **VARIO**

ENTRANCE FLOORING SOLUTIONS

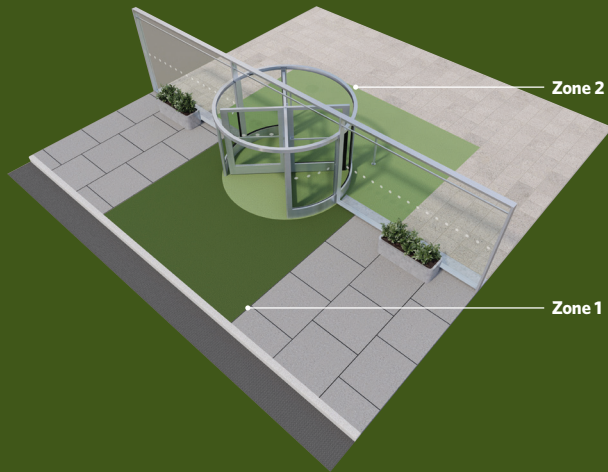

**ECONYL®**  
Made with 100% Regenerated Nylon


*Milliken*



The right combination of OBEX products, correctly installed, can lengthen the appearance retention and, ultimately, the life of the floor coverings inside commercial and public buildings.

**Zone 1 - Outdoors:** The area just before the building access - requires a product with **scraping** action to remove grit and heavy dirt particles, as well as the draining of rain when exposed to the elements.

**Zone 2 - Indoors:** The primary area just inside the building - requires a product with dual action for **dirt scraping and moisture retention**, to prevent floor contamination. This area often features a recessed mat well.

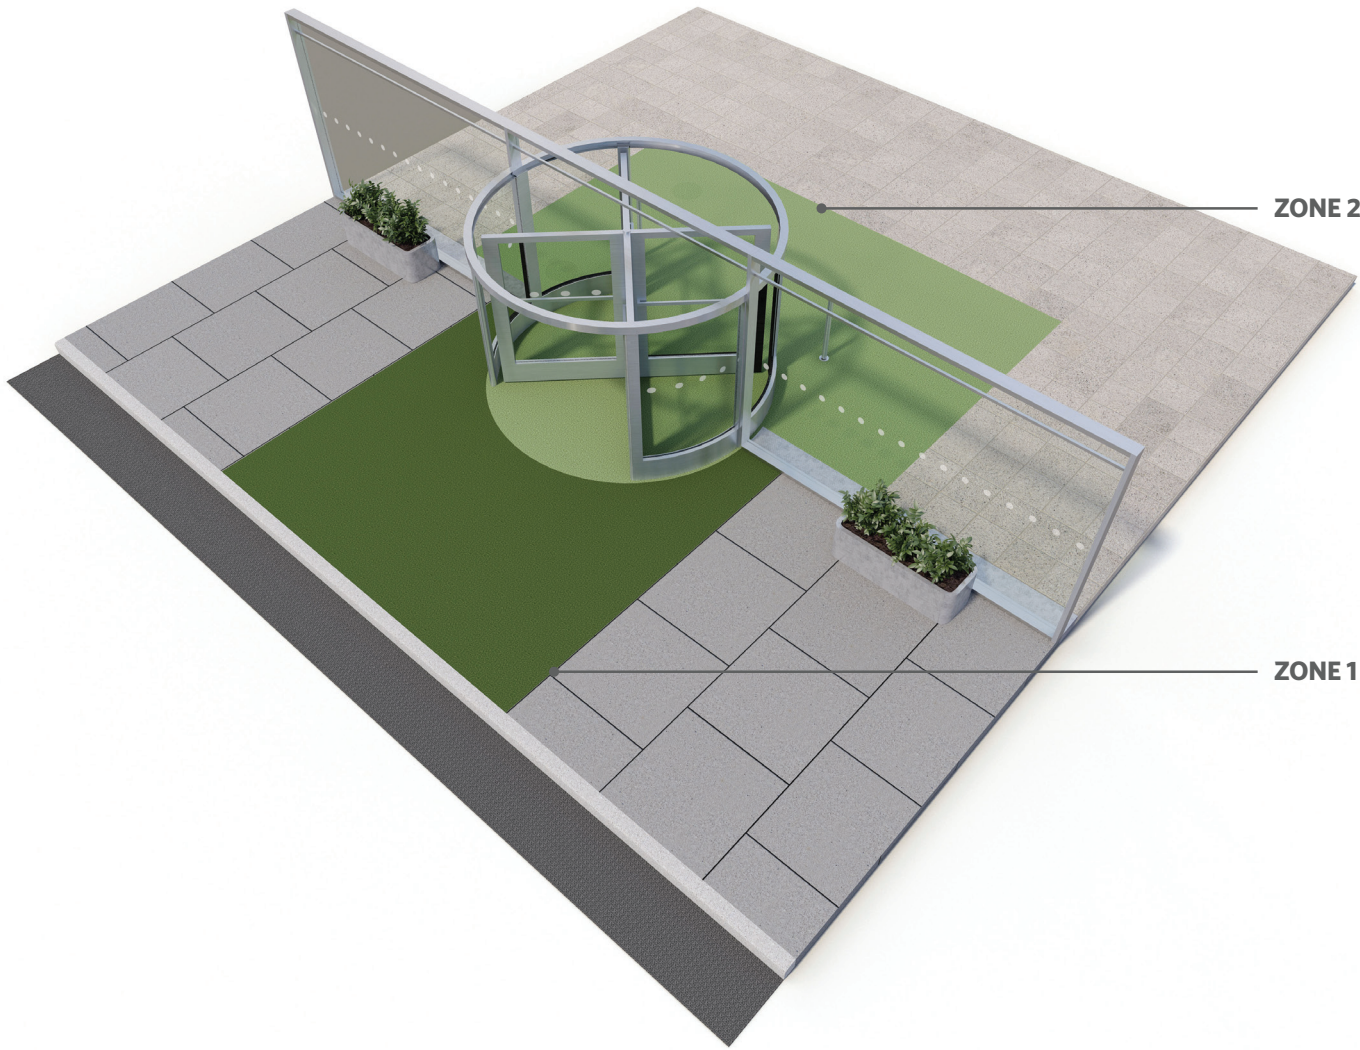

ZONE 1	PROFILE THICKNESS	RUBBER INSERTS FOR ZONE 1 & 2	SCRAPER INSERTS FOR ZONE 1 & 2	FORIS INSERTS FOR ZONE 2
Vario - Rubber inserts	9 mm	VARIO 9 R33	VARIO 9 S33 VARIO 9 S69	VARIO 9 F33 VARIO 9 F69
Vario - Scraper inserts	9mm SURFACE MOUNTED	VARIO 9 R33 SM	VARIO 9 S33 SM VARIO 9 S69 SM	VARIO 9 F33 SM VARIO 9 F69 SM
ZONE 2	14 mm	VARIO 14 R33	VARIO 14 S33 VARIO 14 S69	VARIO 14 F33 VARIO 14 F69
Vario - Rubber inserts	20 mm	VARIO 20 R33	VARIO 20 S33	VARIO 20 F33
Vario - Scraper inserts				
Vario - Foris inserts				



Part of the OBEX concept, Vario is a brand new product collection. It is a highly innovative entryway solution combining a unique aluminium profile system with **high performance textile inserts** for a long lasting and aesthetically pleasing installation in modern building entrances.

Vario features **a patented click-in aluminium profile system** which has been specially designed for installation directly on customer premises to prevent any potential issues with incorrect measurements, as well as allowing cutting on site to fit any shape. It can be installed in extra large widths up to 4.5 metres, with unlimited length, as profiles are assembled on site.

It is offered in 3 thicknesses - 9, 14, and 20 mm - to cope with any architectural situation and can be installed in recessed mat wells or surface mounted on the floor. For outdoor applications, Vario can be installed as a first line of defence to scrape heavy particles of dirt, with a choice of rubber infills or solution dyed textile inserts made of 100% ECONYL® polyamide monofilaments.

For indoor installations, the Foris textile inserts made of 100% ECONYL® polyamide dual fibres provide a fantastic functionality, further developed by a choice of classic inserts with 33 mm width for a 66% coverage of the matting area, or extra-large inserts in 69 mm width for an 80% coverage of the product surface.







**VARIO WITH RUBBER INSERTS**


For outdoor applications in zone 1 - available in 33mm inserts



33mm inserts

**VARIO WITH SCRAPER TEXTILE INSERTS**

For applications in zone 1 and zone 2 - available with 33mm and 69mm inserts

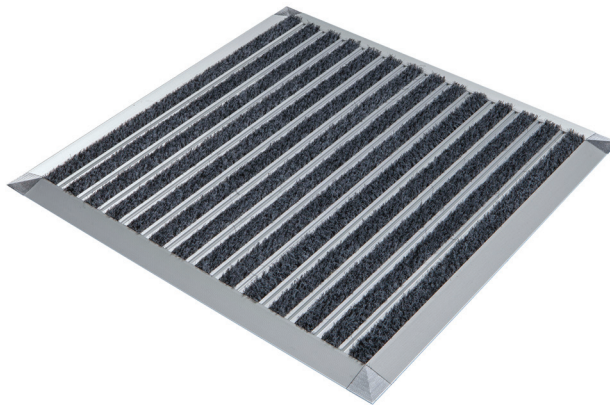


33mm inserts




69mm inserts

**VARIO WITH FORIS TEXTILE INSERTS**

For indoor applications in zone 2 - available with 33mm and 69mm inserts

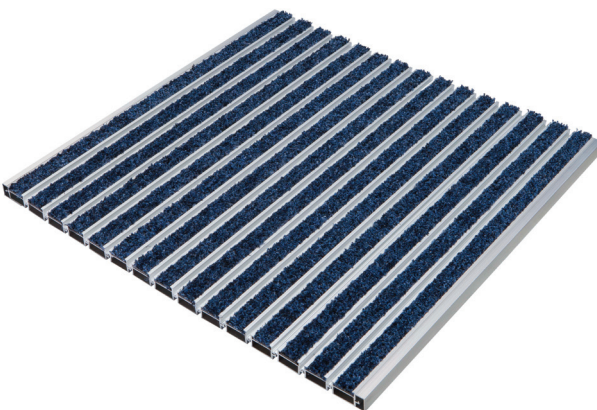

33mm inserts

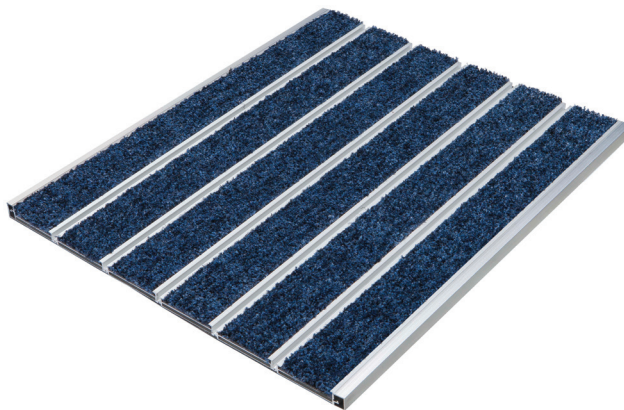


69mm inserts


For full colour range see pages 7.





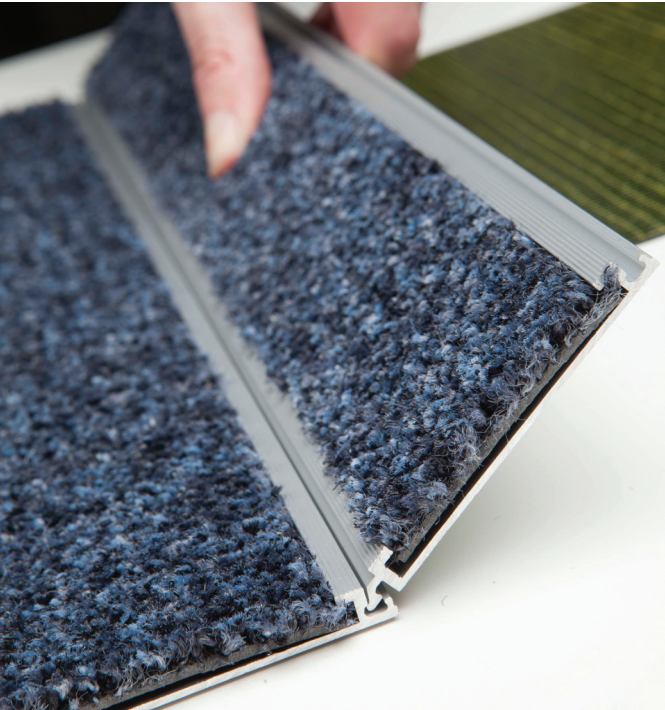


Vario 9

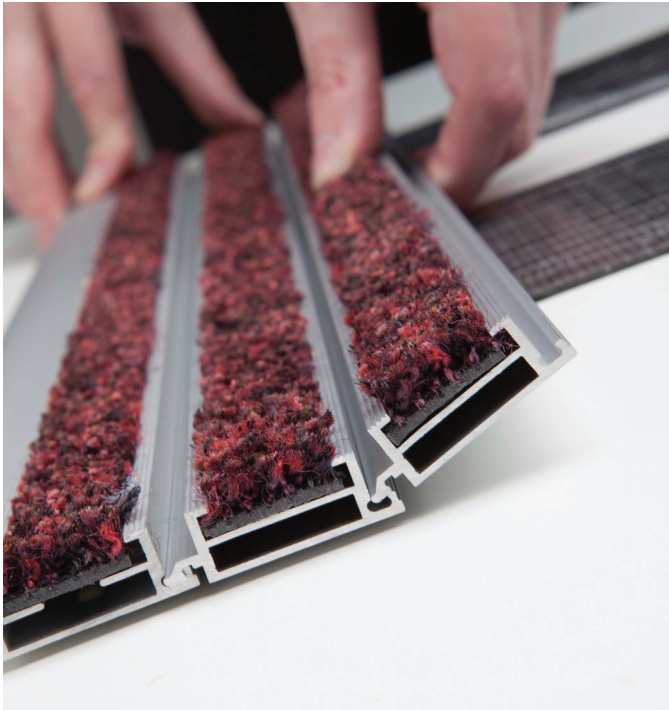


Vario 14

Unique patented aluminium click-in profile system - available in 9mm, 14mm and 20mm thickness. High quality aluminium material with 33% recycled content, combined with 100% recycled polyamide textile inserts, provides an environmentally friendly product.

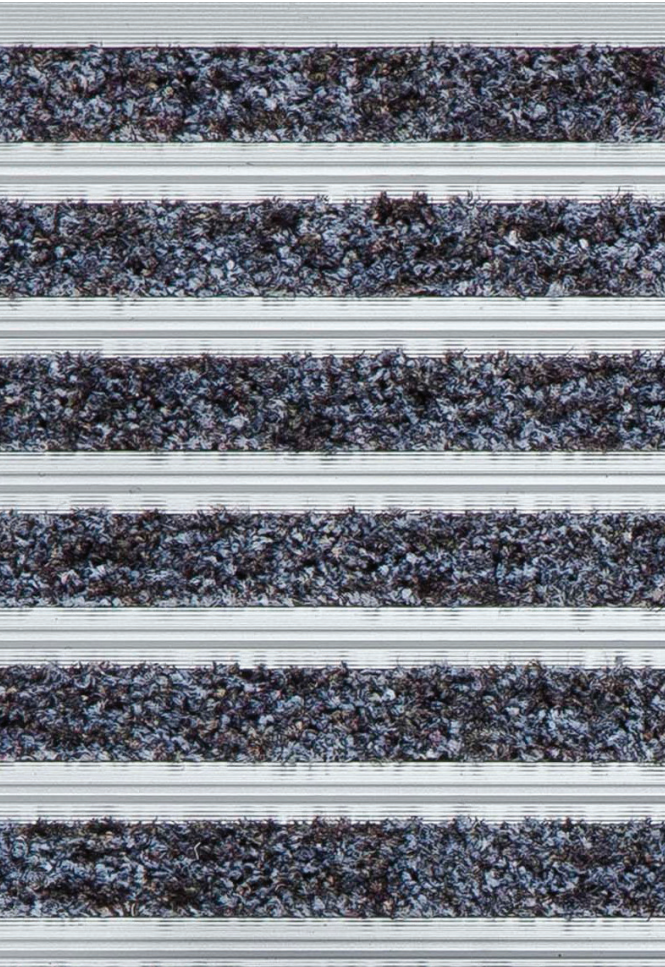

33mm Textile Inserts

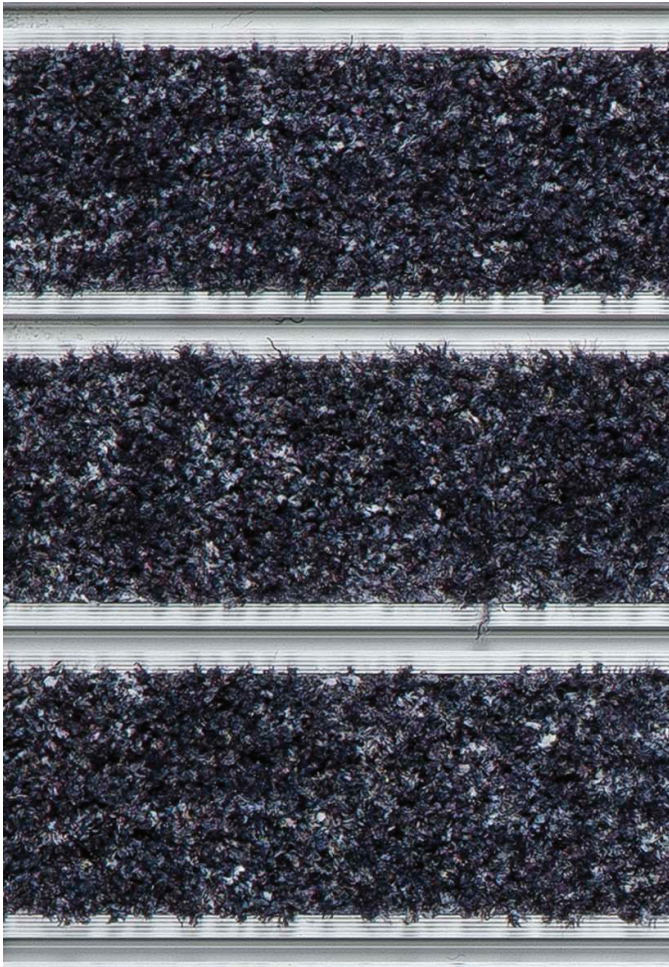

69mm Textile Inserts



SUBFLOOR PREPARATION

Ensure subfloor is perfectly level, sound, clean and free of contaminants such as grease. If greasy, clean with degreaser and prime using neoprene primer. Use levelling compounds or latex if necessary. It may also be necessary to screed up the mat-well area when depth is more than 17 mm, or to compensate the mat well depth by using OBEX Eco-flex underlay (+/- 4 mm thickness)

EASY TO INSTALL


OBEX VARIO is extremely easy to install on site thanks to its click-in profile system. Simple tools such as an electric handsaw can be used if adjustment on site is required. It is supplied with edging system and corners for surface mounted installation in 9 mm thickness. For recessed installations Vario is supplied by default with start and finish profiles in "J" shape for a perfect finish.

EASY TO CLEAN


VARIO features a unique textile with an open construction for easy dirt release when cleaning. The closed structure of the profile system allows cleaning on site without having to move or lift the product. Daily vaccuming is recommended and a hot water extraction should be used if soiling remains visible after vaccuming.

VARIO - COLOUR OPTIONS

VARIO - with 69mm Foris textile inserts

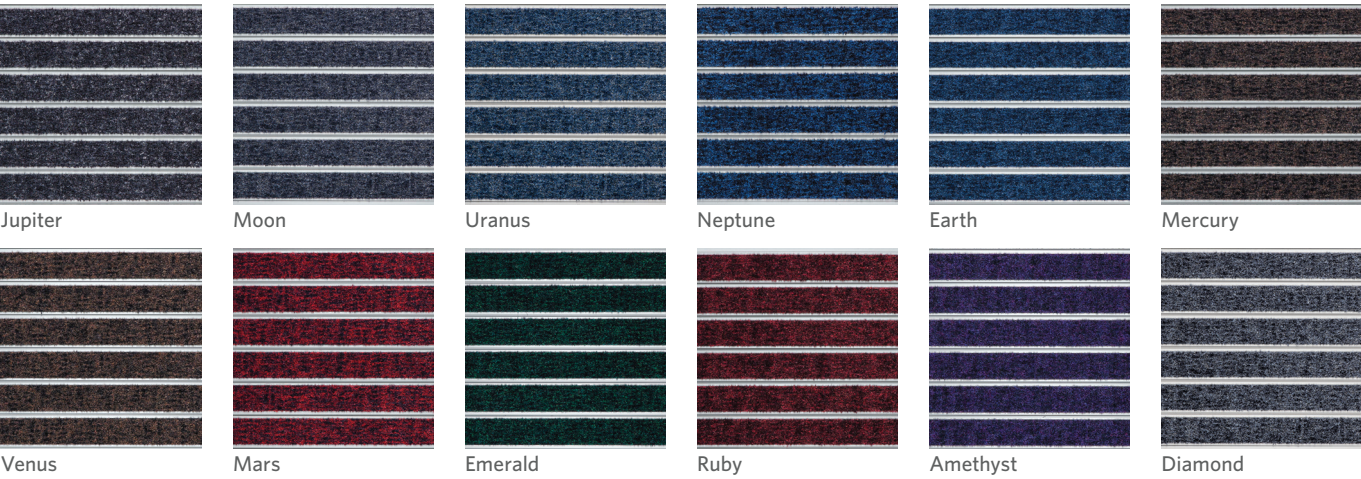

VARIO - with 33mm Foris textile inserts

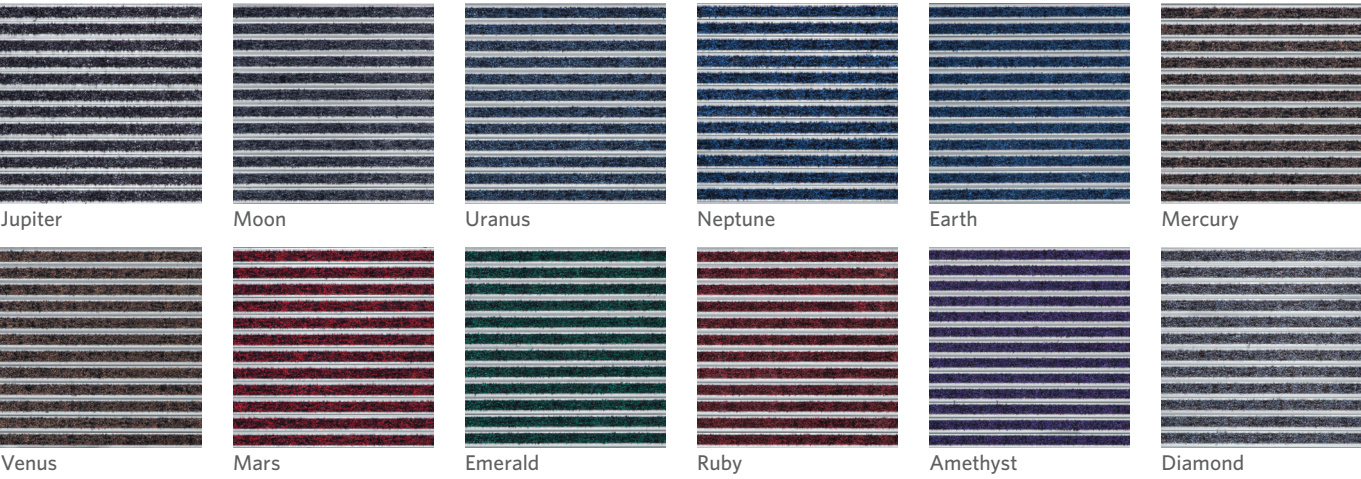



Have you seen our complete OBEX product collection ?



ARX Forma HD (installed at a shopping center)



Quadrus (installed at Lloyds of London)

## Showrooms



Clerkenwell, London



Shanghai

### Milliken - Europe, Africa, Middle East

Beech Hill Plant, Gidlow Lane,  
Wigan, WN6 8RN,  
United Kingdom  
T: +44 1942 612999  
F: +44 1942 612499  
Enquiries: matsinfoeurope@milliken.com  
Orders: matsorderseurope@milliken.com  
UK: Freephone: 0800 964 569

### Milliken - Asia, India, Australia, New Zealand

15th Floor, Building 2,  
1535 Hong Mei Road, Xuhui District,  
Shanghai, China 200233  
T: +8621 6145 5555  
F: +8621 6145 5558  
Enquiries & Orders:  
CustomerService.CH@milliken.com

### Milliken - Americas

920 Milliken Road,  
Spartanburg,  
South Carolina 29303, USA  
T: 1.800.342.5539  
F: 706.880.5358  
Enquiries & Orders:  
mats.orders@Milliken.com